

## Annexure 1 – DR Connection parameters of BOLT Plus Trading system for Currency Derivatives segment


Trading members can connect to the DR site of BOLT Plus trading system using either BOLT TWS

or 3<sup>rd</sup> party trading application of empanelled vendors or in-house developed systems through ETI APIs as follows –

### 1. BOLT TWS Users

Trading members shall have to change the technical connection parameters in the configuration

settings window at the time of login. Configuration settings window can be invoked using the scrip profile icon or “Shift+F12” shortcut keys on BOLT TWS.

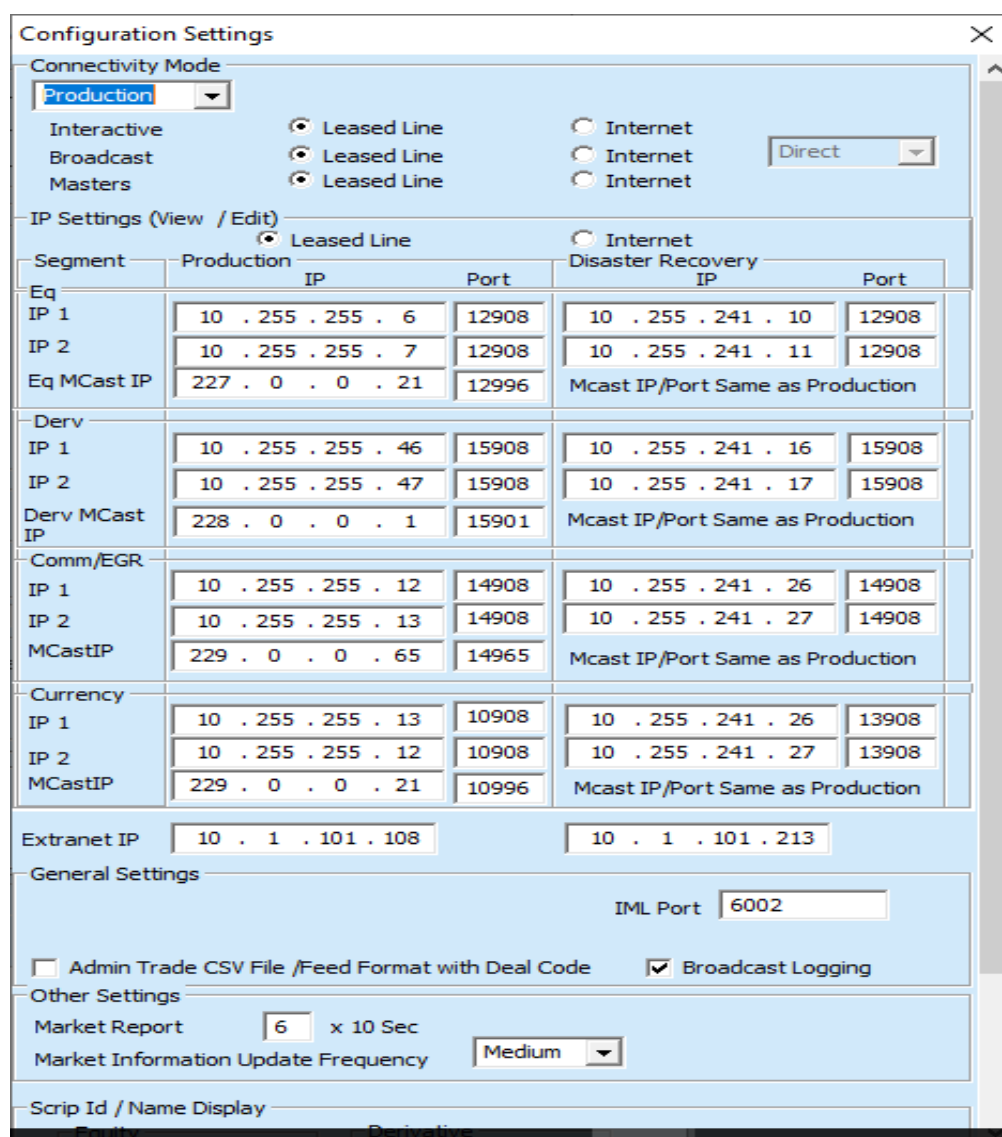

Segment	Production IP	Port	Disaster Recovery IP	Port
Eq IP 1	10 . 255 . 255 . 6	12908	10 . 255 . 241 . 10	12908
Eq IP 2	10 . 255 . 255 . 7	12908	10 . 255 . 241 . 11	12908
Eq MCast IP	227 . 0 . 0 . 21	12996	Mcast IP/Port Same as Production	
Derv IP 1	10 . 255 . 255 . 46	15908	10 . 255 . 241 . 16	15908
Derv IP 2	10 . 255 . 255 . 47	15908	10 . 255 . 241 . 17	15908
Derv MCast IP	228 . 0 . 0 . 1	15901	Mcast IP/Port Same as Production	
Comm/EGR IP 1	10 . 255 . 255 . 12	14908	10 . 255 . 241 . 26	14908
Comm/EGR IP 2	10 . 255 . 255 . 13	14908	10 . 255 . 241 . 27	14908
Comm/EGR MCastIP	229 . 0 . 0 . 65	14965	Mcast IP/Port Same as Production	
Currency IP 1	10 . 255 . 255 . 13	10908	10 . 255 . 241 . 26	13908
Currency IP 2	10 . 255 . 255 . 12	10908	10 . 255 . 241 . 27	13908
Currency MCastIP	229 . 0 . 0 . 21	10996	Mcast IP/Port Same as Production	

Extranet IP: 10 . 1 . 101 . 108      10 . 1 . 101 . 213

General Settings: IML Port: 6002

Other Settings: Market Report: 6 x 10 Sec, Market Information Update Frequency: Medium

### 2. 3<sup>rd</sup> party trading application through ETI APIs

i. Connecting through ETI – members shall have to change the technical connection parameters in their respective trading application as follows –

Primary DR – IP: 10.255.241.26; Port: 13908

Secondary DR – IP: 10.255.241.27; Port: 13908

\*\*\*\*End of Document\*\*\*\*